

# TOPCAT® K1

Drw.No. 766 K1




## Measurement

**ITCA** International Topcat  
Class Association

Stand:01.02.2014

Wanten	1x19	4,0 Ø	A=6880 mm +/- 10
Shrouds			
Trapezwanten	1x19	2,5 Ø	B=6240 mm +/- 30
Trapez wires			
Stander	1x19	4,0 Ø	C=400 mm +/- 50
Stander			
Vorstag	1x19	3,0 Ø	D=5850 mm +/- 10
Forestay			
Fockfall	7x19	2,0 Ø	5850 mm +/- 10
Jib halyard			
Gabelseil	1x19	4,0 Ø	1035 mm +/- 5
Bridal wires			
Diamonds	1x19	4,0 Ø	6425 mm +/- 5

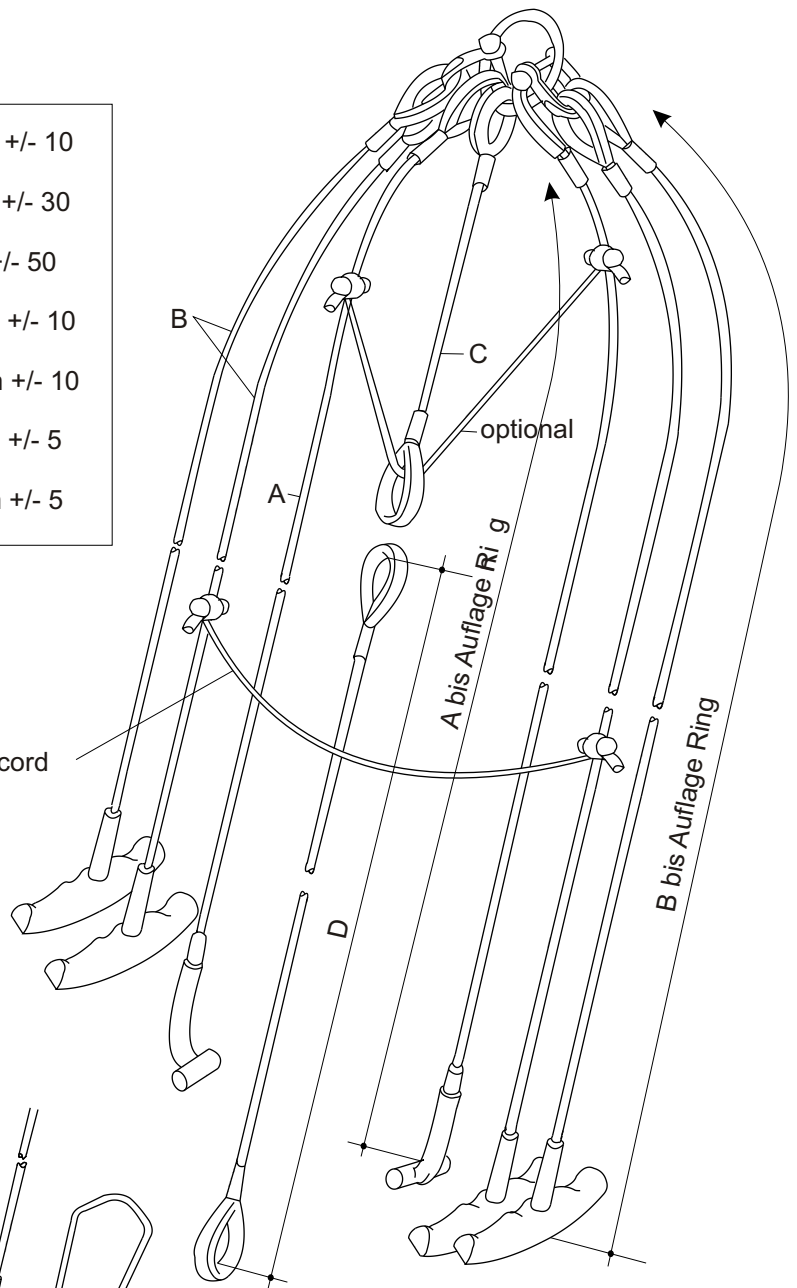

Optional:  
Führung Trapezgummi  
durch Vorderbeam

